

EA31

High Performance
2D Imager with LED Aimer



The EA31 is part of Intermec's new generation of 2D imagers, offering best in class motion tolerance and time to read—providing a distinct performance advantage to the products in which it is integrated.

- Class-leading motion tolerance of 400 in/s delivers a distinct performance advantage, resulting in snappier scans and less hassle
- Highly visible and safe LED-based aimer, ideal for customer-facing applications
- Equipped with Intermec's patented VESTA algorithm, extending the read range of some 1D codes by an average of 60 percent
- Future proofed—reads 1D & 2D matrix codes, captures signatures and images
- Rugged design withstands extreme temperatures, vibrations and shock for extended use in tough environments
- Compact dimensions, to fit into the tightest mechanical constraints
- Flexible—wide range of integration options such as USB and RS 232 TTL interfaces, and full compatibility with the Intermec Communication Protocol

Differentiate Yourself with Unsurpassed Performance

The Intermec EA31 is the industry's first 2D imager combining an LED-based aimer with very high motion tolerance to deliver incredible scanning responsiveness. With omni-directional reading capabilities, the EA31 can achieve high read rates irrespective of bar code angle or orientation. This rapid scanning capability, combined with the safe LED-based aimer, make EA31 well suited for dynamic retail and customer-facing applications. To make integration easier, the EA31 also complies with stringent standards for shock and vibration and can successfully operate within a wide temperature range.

LED Aimer: Safe, Yet Pronounced

Equipped with a red LED aimer, EA31 fits the needs of customer-facing applications where lasers are often prohibited. Ideal applications include healthcare; retail point-of-sale; kiosks; and access control applications. By utilizing a highly visible 617 nm red LED scanning line, products that feature EA31 can be easily aimed, even in low light or indoor environments.

Patented Decoding and Range Boosting Technologies

The EA31 is an excellent choice for applications that call for the ability to read damaged, poorly printed, overlaid and colored bar codes. Integrated decoding software can correct for many bar code imperfections on-the-fly, resulting in

an uncanny ability to interpret codes in difficult scanning situations. Thanks to VESTA, Intermec's patented scanning algorithm, scan range is also enhanced by an average of 60 percent when scanning EAN/UPC and Code 39 symbologies.

Additional value-added decoding capabilities include the ability to scan multiple bar codes in a single scan, as well as support for scanning in auto-trigger mode. Support for 1D, stacked, composite and 2D matrix codes provides assurance that designs incorporating EA31 will be ready for the future, while supporting today's industry standards.

Confidence Today; Protection for the Future

Compact size, standard interfaces, common development tools and software simplify integration of EA31 into space-constrained devices. When combined with Intermec ED30 and ED40 decode boards—one of the most compact USB boards currently available—outstanding performance can be achieved in a very small footprint.

Choosing Intermec can help minimize develop efforts. Intermec 2D imagers are interchangeable, so switching from EA31 to another Intermec 2D imager is easy. Furthermore, Intermec 1D imager interfaces are compatible with Intermec 2D imager decode boards. This compatibility ensures a simple migration path and contributes to a future-proofed design.

Design

Technology: 2D imager
Light Source: Highly visible white LED.
High efficiency 100 lm/W
Aimer: 617 nm red LED

Physical Characteristics

Dimensions: 21.95 mm W x 14.2 mm D x 13 mm H
(0.86 in W x .0.56 in D x 0.51 in H)
Weight: <7g

Scanning Performance

Scan Rate: up to 60 fps
Scan Angle: 39° (Horizontal), 25.5° (Vertical)
Optical resolution: 752 (H) x 480 (V) pixels,
256 gray levels
Min x. dimension:
1D codes 0.1 mm (4 mils)
2D codes 0.167 mm (6.6 mils)
Print contrast: Down to 30%
Motion Tolerance: Up to 400ips or 10.16m/s

Symbologies

1D symbologies: EAN/UPC, GS1 Databar (limited expanded & omni-directional), Code 39, Code 128, UCC/EAN 128, ISBN, ISBT, Interleaved/Matrix/Industrial and Standard 2 of 5, Codabar, Code 93/93i, Code 11, MSI, Plessey, Telepen, postal codes (Australian Post, BPO, Canada Post, Dutch Post, Japan Post, PostNet, Sweden Post)
2D symbologies: Data Matrix, PDF417, Micro PDF 417, Codablock, Maxicode, QR, Aztec

Value-Ad Functions (non-exhaustive)

Multicodes reading, data editing, image capture, signature capture, scanning barcodes on mobile phone screens, illumination, aiming, presentation modes

Interfaces

Connector: 25 pin ZIF, pitch 0.3 mm (0.12 in)
Decode and image transfer: USB interface (see ED40 Decode Board) and/or RS 232 TTL (ED30 Decode Board)
Intermec Scanner Control Protocol (ISCP)

Electrical Characteristics

Voltage: 3.3V- 5%/+10%
Operating Current: 300mA @ 3.3V typical
Standby current: <2mA


Environmental Characteristics

Ambient light: from 0 to 100 000 lux
Operating temperature: -20° to 50° C (-4° to 122° F)
Storage temperature: -40° to 70° C (-40° to 158° F)
Relative humidity: 95% at 60° C (140° F)
(non-condensing), 4 days
Shock: 2000G, 0.7ms, half sinus, 6 directions
Vibration: 8G r.m.s., from 10Hz to 500Hz, 2 hours/axis, 3 axes


Regulatory Approvals

UL, cUL, VDE
RoHS
See integration guide for more details

Typical Standard Reading Distances

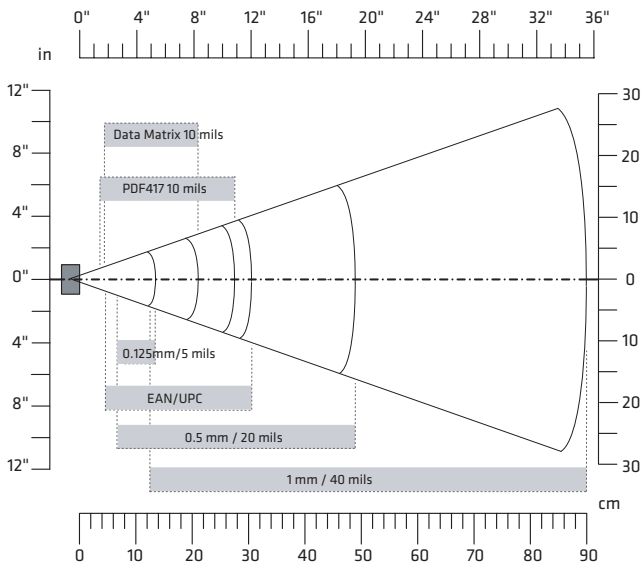

Typical Extended (VESTA*) Reading Distances

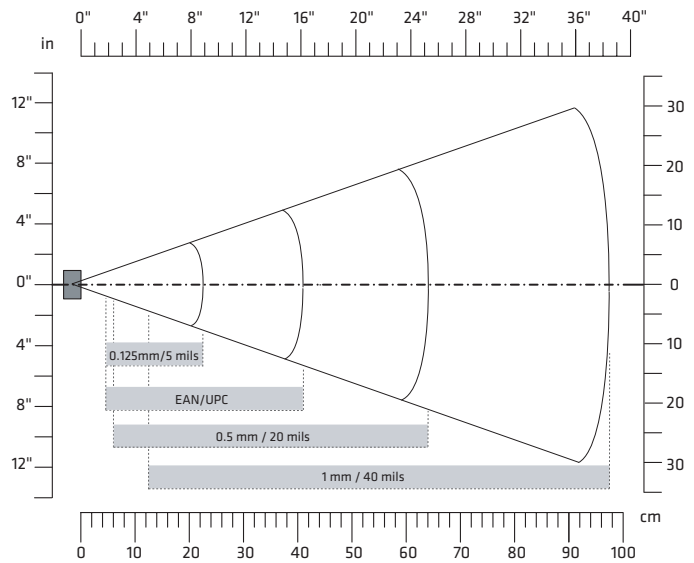

*VESTA is an Intermec-patented algorithm that increases read range of Code 39 and EAN/UPC marks by an average of 60 percent (compared to EA31 read range with VESTA disabled).

North America

Corporate Headquarters
6001 36th Avenue West
Everett, Washington 98203
Phone: (425) 348 2600
Fax: (425) 355 9551

North Latin America

Headquarters Office
Mexico
Phone: (+52) 55 52 41 48 00
Fax: (+52) 55 52 11 81 21

South Latin America

Headquarters Office
Brazil
Phone: (+55) 11 3711 6776
Fax: (+55) 11 5502 6780

Europe, Middle East & Africa

Headquarters Office
Reading, United Kingdom
Phone: (+44) 118 923 0800
Fax: (+44) 118 923 0801

Asia Pacific

Headquarters Office
Singapore
Phone: (+65) 6303 2100
Fax: (+65) 6303 2199

Media Sales

EMEA: (+31) 24 372 3167
USA: (513) 874 5882
<http://intermec.custhelp.com>

Sales

Toll Free NA: (800) 934 3163
Toll in NA: (425) 348 2726
Freephone ROW:
00800 4488 8844

OEM Sales

Phone: (425) 348 2762

Customer Service and Support

Toll Free NA: (800) 755 5505
Toll in NA: (425) 356 1799
EMEA: intermec.custhelp.com

Internet

www.intermec.com

Worldwide Locations

www.intermec.com/locations



Copyright © 2012 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners.
612232-A 10/12

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.